



TRANSFORMER






主要產品 Main Products



品質管理-檢查 Inspection




品質管理中心 QC Department

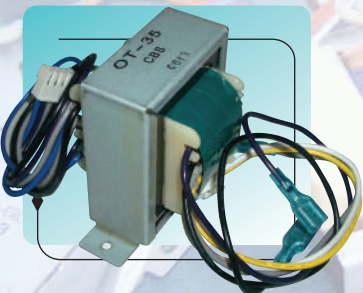


BE CBY型



名稱	標準 出力 VA	±1 A	±1 B	MAX C1	MAX C2	±1 D	±0.5 E	MAX F	±1 L	±0.3 d	±1 S	t	±0.3 e	Weight (kg) approx
CBY28-11	1	26.5	29.5	15	15	12.5	8.8	21	38	3.5X4.5	46	0.5	-	0.06
CBY28-14	1.3	26.5	29.5	18	18	15.5	12	21	38	3.5X4.5	46	0.5	-	0.08
CBY35-10	1.5	31.5	36.5	16	16	11.5	8	26	45	3.5X4.5	53	0.5	-	0.09
CBY35-12	2	31.5	36.5	17	17	13.5	10	26	45	3.5X4.5	53	0.5	-	0.10
CBY35-14	2.5	31.5	36.5	18	18	15.5	12	26	45	3.5X4.5	53	0.5	-	0.12
CBY41-14	3.5	35	42.5	19	19	15.5	12	30	52	3.5X4.5	59	0.5	-	0.15
CBY41-16	4.5	36	43.5	20	20	18.5	14	30	52	3.5X4.5	60	0.8	-	0.20
CBY41-20	5.5	36	43.5	22	22	22.5	18	30	52	3.5X4.5	60	0.8	-	0.23
CBY48-16	6.5	43	50.5	21	21	18.5	15	32	59	4.5X6.5	69	0.8	-	0.23
CBY48-18	8	43	50.5	22	22	20.5	16	32	59	4.5X6.5	69	0.8	-	0.30
CBY48-20	9.5	43	50.5	23	23	22.5	18	32	59	4.5X6.5	69	0.8	-	0.33
CBY48-25	12.5	43	50.5	26	26	27.5	22	32	59	4.5X6.5	69	0.8	-	0.40
CBY54-21.5	12	48	56.5	25	25	24	20	36	69	4.5X6.5	80	0.8	-	0.50
CBY57-20	12	50.5	59.5	26(30)	26	22.5	18	39	72	4.5X6.5	83	0.8	-	0.58
CBY57-25	18	50.6	59.5	28(32)	28	27.5	24	39	72	4.5X6.5	83	0.8	-	0.65
CBY60-20	13	54	62.5	26(30)	26	22.5	20	40	75	4.5X6.0	86	0.8	-	0.70
CBY60-25	20	54	62.5	28(32)	28	27.5	22	40	75	4.5X6.5	86	0.8	-	0.70
CBY60-30	25	54	62.5	30(36)	30	32.5	28	40	75	4.5X6.5	86	0.8	-	0.80
CBY66-25	25	58.5	68.5	29(34)	29	27.5	24	45	81	4.5X6.5	92	0.8	-	0.85
CBY66-30	33	58.5	68.5	32(37)	32	32.5	25	45	81	4.5X6.5	92	0.8	-	1.0
CBY66-35	41	58.5	68.5	34(39)	34	37.5	30	45	81	4.5X6.5	92	0.8	-	1.1
CBY67-35	45	59.5	69.5	37(42)	37	37.5	32	48	81	4.5X6.5	92	0.8	20	1.1
CBY67-40	54	59.5	69.5	45	42	42.5	38	48	81	4.5X6.5	92	0.8	25	1.2
CBY67-45	63	59.5	69.5	48	45	47.5	42	48	81	4.5X6.5	92	0.8	30	1.4
CBY67-50	71	59.5	69.5	50	47	52.5	48	48	81	4.5X6.5	92	0.8	35	1.5
CBY67-55	76	59.5	69.5	53	50	57.5	53	48	81	4.5X6.5	92	0.8	40	0.6



BE CBT型

名稱	標準 出力 VA	±1 A	±1 B	MAX C1	MAX C2	±1 D	±0.5 E	MAX F	±1 L	±0.3 d	±1 S	t	±0.3 e	Weight (kg) approx
CBT28-14	1.3	31	26.5	18	18	15.5	12	20	35	3.5X4.5	43	0.5	-	0.08
CBT35-10	1.5	37	31	16	16	11.5	10	23	40	3.5X4.5	48	0.5	-	0.09
CBT35-12	2	37	31	17	17	13.5	11	23	40	3.5X4.5	48	0.5	-	0.10
CBT35-14	2.5	37	31	18	18	15.5	11	23	40	3.5X4.5	48	0.5	-	0.12
CBT41-14	3.5	44	35	19	19	15.5	12	25	45	3.5X4.5	53	0.5	-	0.15
CBT41-16	4.5	44	35	20	20	18.5	14	25	44	3.5X4.5	52	0.8	-	0.20
CBT41-20	5.5	44	35	22	22	22.5	16	25	44	3.5X4.5	52	0.5	-	0.23
CBT48-16	6.5	51	42.5	21	21	18.5	14	28	51	4.5X6.5	60.5	0.8	-	0.23
CBT48-18	8	51	42.5	22	22	20.5	16	28	51	4.5X6.5	62	0.8	-	0.30
CBT48-20	9.5	51	42.5	23	23	22.5	16	28	52	4.5X6.5	62	0.8	-	0.33
CBT48-25	12.5	51	42.5	26	26	27.5	22	28	52	4.5X6.5	62	0.8	-	0.40
CBT54-21.5	12	58.5	47.5	25	25	23.5	17	31	60	4.5X6.5	71	0.8	-	0.50
CBT57-20	12	60.5	50.5	26(30)	26	22.5	18	33	62	4.5X6.5	73	0.8	-	0.58
CBT57-25	18	60.5	50.5	28(32)	28	27.5	20	33	62	4.5X6.5	73	0.8	-	0.65
CBT60-20	13	64	52.5	26(30)	26	22.5	18	34	65	4.5X6.5	76	0.8	-	0.60
CBT60-25	20	64	52.5	28(32)	28	27.5	22	34	65	4.5X6.5	76	0.8	-	0.70
CBT60-30	25	64	52.5	31(35)	31	32.5	28	34	65	4.5X6.5	76	0.8	-	0.80
CBT66-25	25	69	57.5	29(34)	29	27.5	20	37	70	4.5X6.5	81	0.8	-	0.85
CBT66-30	33	69	57.5	32(37)	32	32.5	25	37	70	4.5X6.5	81	0.8	-	1.0
CBT66-35	41	69	57.5	34(39)	34	37.5	30	37	70	4.5X6.5	81	0.8	-	1.1
CBT67-35	45	70	58.5	37(42)	37	37.5	32	48	70	4.5X6.5	81	0.8	20	1.1
CBT67-40	54	70	58.5	45	42	42.5	38	48	70	4.5X6.5	81	0.8	25	1.2
CBT67-45	63	70	58.5	48	45	47.5	42	48	70	4.6X6.5	81	0.8	30	1.4
CBT67-50	71	70	58.5	50	47	52.5	48	48	70	4.5X6.5	81	0.8	35	1.5
CBT67-55	76	70	58.5	53	50	57.5	-	48	70	4.5X6.5	81	0.8	40	1.6



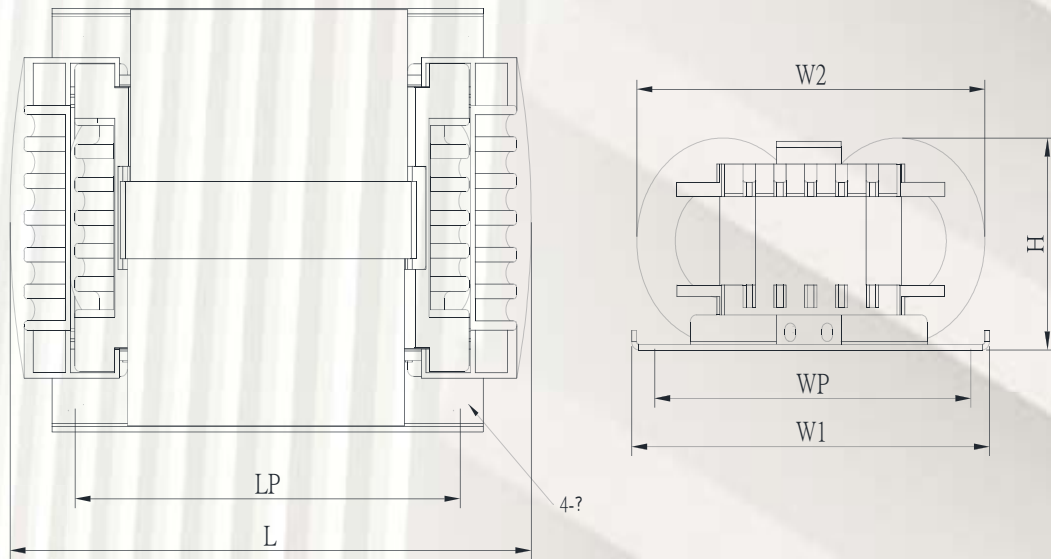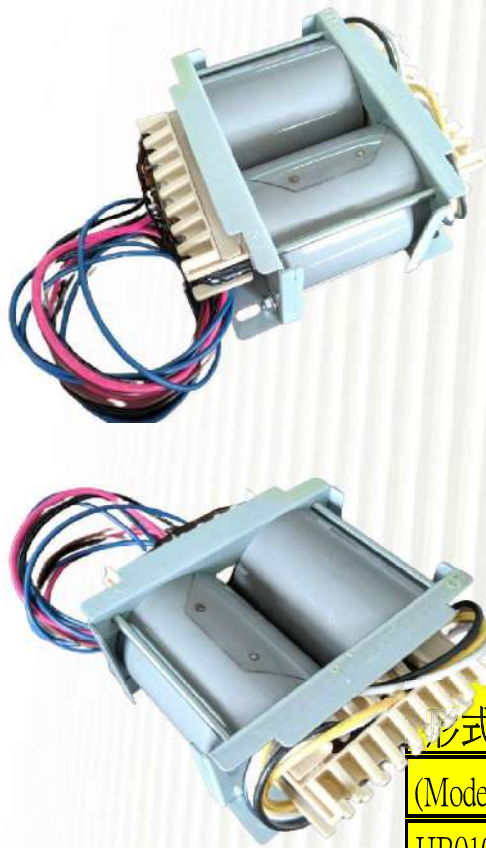

形式 (Model)	容量 (VA)	寬度 (W1/W2)	孔距 (WP)	長度 (L)	孔距 (LP)	高度 (H)	孔徑 4-φ	重量概估 (Kg)
HB0100	100-130	100/96	85	120	85	49	5.5	1.5
HB0150	150-200	105/102	90	132	95	52	5.5	2
HB0200	200-275	108/108	93	138	95	55	5.5	2.3
HB0300	275-350	115/120	100	144	105	61	5.5	3.1
HB0500	500-570	125/132	110	165	125	67	5.5	4.7
HB0750	750-1000	140/146	120	173	135	74	5.5	6.6
HB1000	1000-1250	145/150	125	193	145	76	6.5	7.9
HB1500	1500-1700	160/171	140	215	160	86	6.5	11
HB-1U	250-350	85/82	77	215	192	40	4*10	2.6

長度單位:mm

