


CE Test Report 1#

Project No. :	/	Customer :	嘉邦
Sample No. :	/	EUT :	PCB 板
Model :	CBE-1505-1#	Mode :	5V3A
Voltage :	100V/60Hz	Engineer :	/
Temp :	24°C	Humi :	69%
Reviewed By :	/	Remark :	/

DateTime:2024-06-19 13:56:19

Test Standard	(CE) J55014-1 Voltage Mains				
Receiver	LISN	Band	Detector	RBW	Time
ESCI	NSLK 8126	150 kHz-30 MHz	PK+,AVG	9 kHz	20 ms

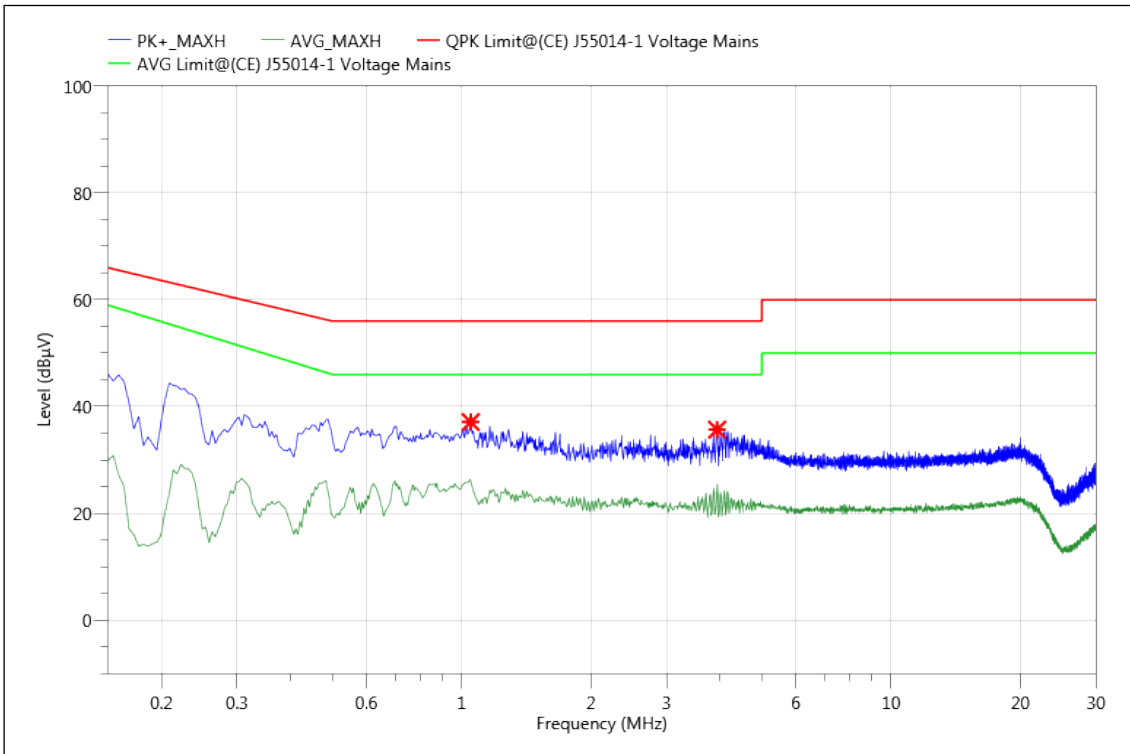

Critical_Freqs (Margin=Limit-Meas.(Reading +Corr.))


No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV)	Limit (dBμV)	Margin (dB)	Det.	Line	PE
1	1.050	26.91	10.18	37.09	56.00	18.91	PK+	N	GND
2	3.935	25.64	10.03	35.67	56.00	20.33	PK+	N	GND

CE Test Report 1#

Project No. :	/	Customer :	嘉邦
Sample No. :	/	EUT :	PCB 板
Model :	CBE-1505-1#	Mode :	5V3A
Voltage :	100V/60Hz	Engineer :	/
Temp :	24°C	Humi :	69%
Reviewed By :	/	Remark :	/

DateTime:2024-06-19 13:59:42

Test Standard	(CE) J55014-1 Voltage Mains				
Receiver	LISN	Band	Detector	RBW	Time
ESCI	NSLK 8126	150 kHz-30 MHz	PK+,AVG	9 kHz	20 ms

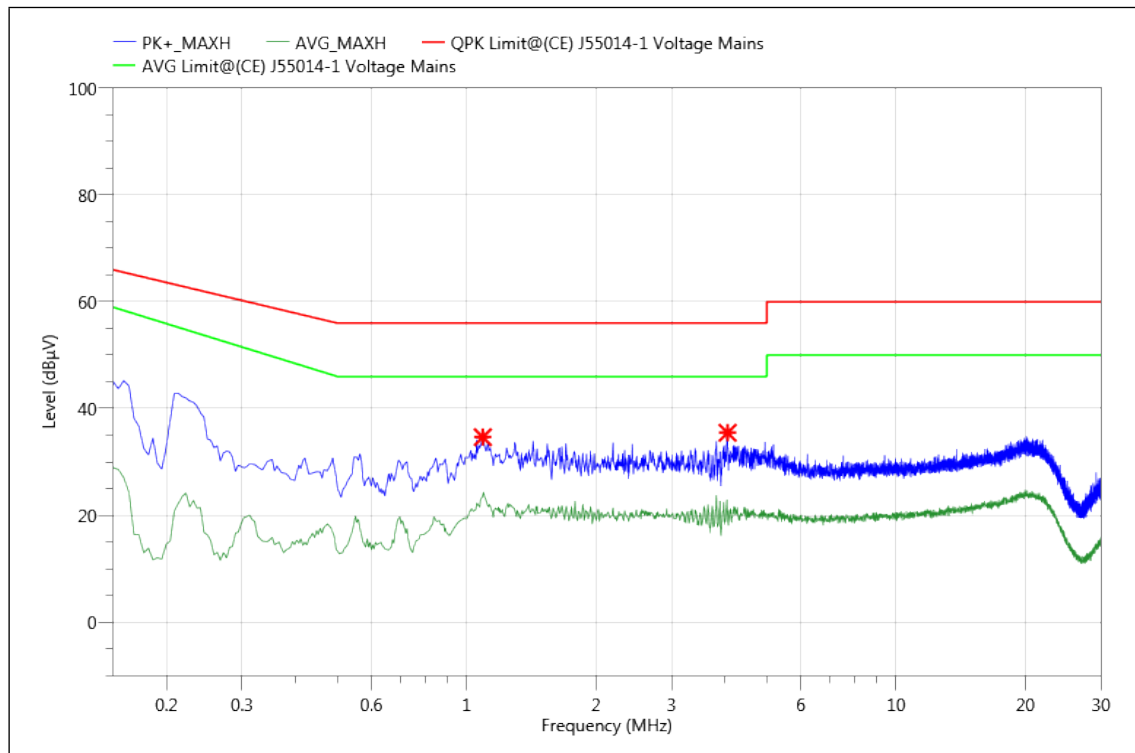

Critical_Freqs (Margin=Limit-Meas.(Reading +Corr.))


No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV)	Limit (dBμV)	Margin (dB)	Det.	Line	PE
1	1.091	24.46	10.17	34.63	56.00	21.37	PK+	L1	GND
2	4.052	25.44	10.03	35.47	56.00	20.53	PK+	L1	GND

CE Test Report 1#

Project No. :	/	Customer :	嘉邦
Sample No. :	/	EUT :	PCB 板
Model :	CBE-1505-1#	Mode :	5V3A
Voltage :	240V50Hz	Engineer :	/
Temp :	24°C	Humi :	69%
Reviewed By :	/	Remark :	/

DateTime:2024-06-19 14:02:59

Test Standard	(CE) J55014-1 Voltage Mains				
Receiver	LISN	Band	Detector	RBW	Time
ESCI	NSLK 8126	150 kHz-30 MHz	PK+,AVG	9 kHz	20 ms

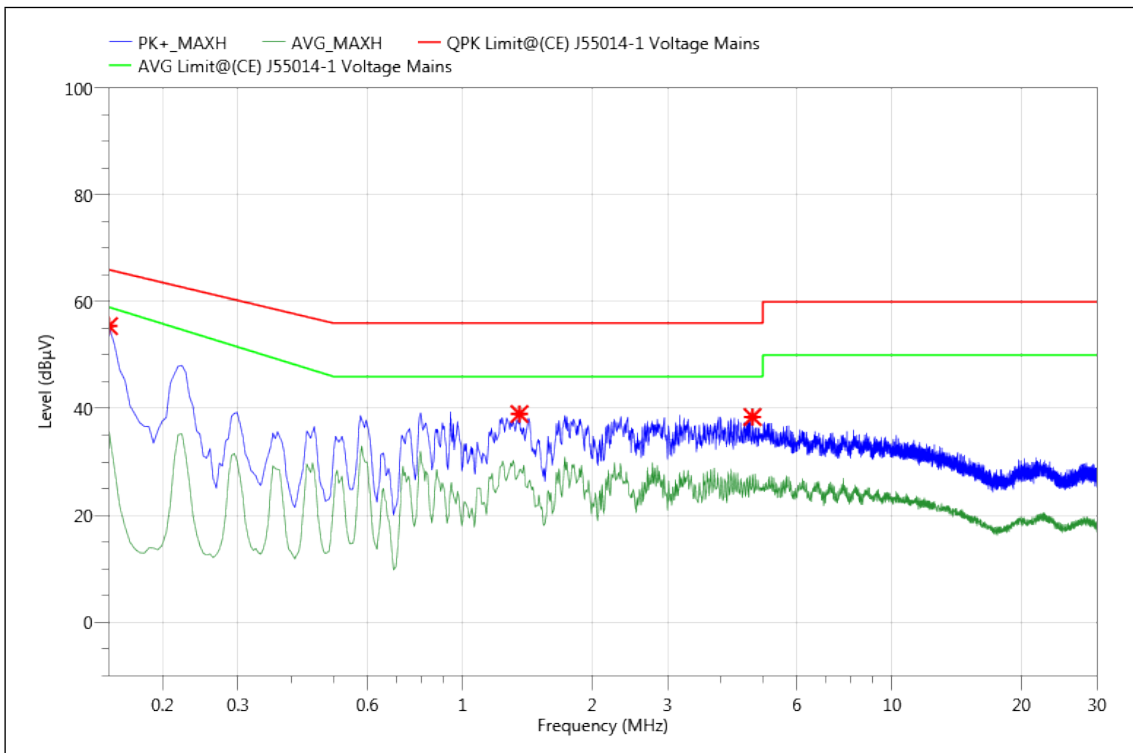

Critical_Freqs (Margin=Limit-Meas.(Reading +Corr.))


No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV)	Limit (dBμV)	Margin (dB)	Det.	Line	PE
1	0.150	45.34	10.11	55.45	66.00	10.55	PK+	L1	GND
2	1.356	28.84	10.13	38.97	56.00	17.03	PK+	L1	GND
3	4.731	28.38	10.02	38.40	56.00	17.60	PK+	L1	GND

CE Test Report 1#

Project No. :	/	Customer :	嘉邦
Sample No. :	/	EUT :	PCB 板
Model :	CBE-1505-1#	Mode :	5V3A
Voltage :	240V50Hz	Engineer :	/
Temp :	24°C	Humi :	69%
Reviewed By :	/	Remark :	/

DateTime:2024-06-19 14:05:40

Test Standard	(CE) J55014-1 Voltage Mains				
Receiver	LISN	Band	Detector	RBW	Time
ESCI	NSLK 8126	150 kHz-30 MHz	PK+,AVG	9 kHz	20 ms

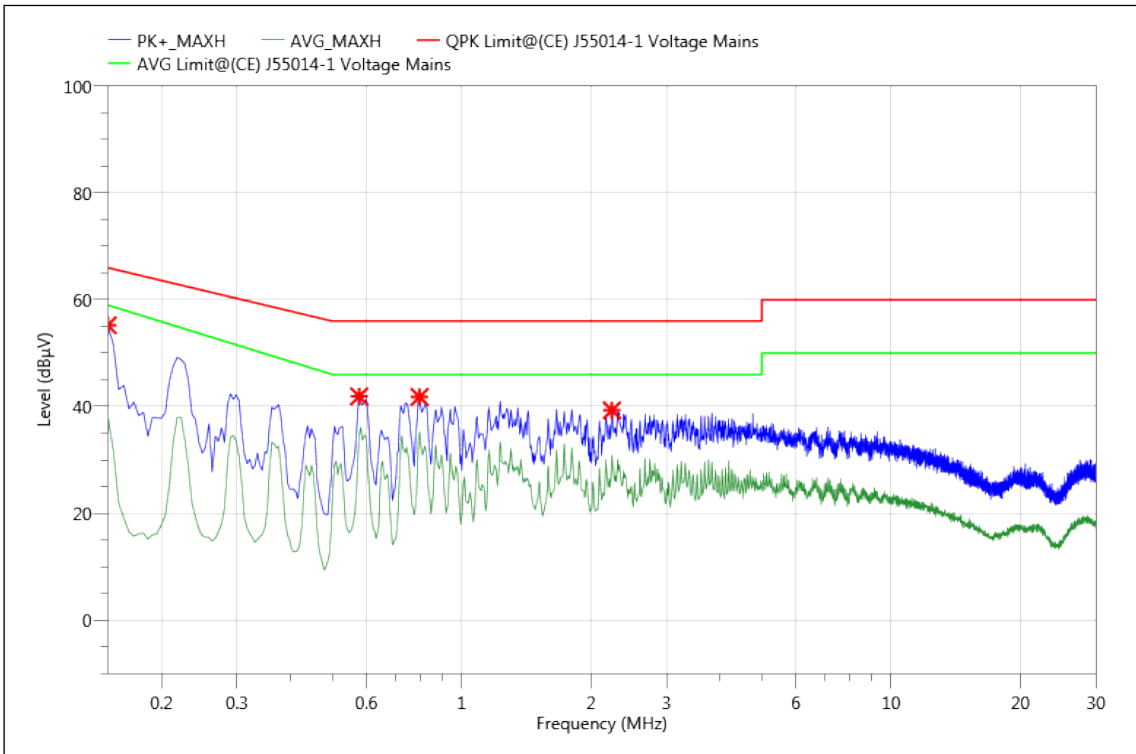

Critical_Freqs (Margin=Limit-Meas.(Reading +Corr.))

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV)	Limit (dBμV)	Margin (dB)	Det.	Line	PE
1	0.150	45.12	10.11	55.23	66.00	10.77	PK+	N	GND
2	0.578	31.84	10.06	41.90	56.00	14.10	PK+	N	GND
3	0.798	31.67	10.12	41.79	56.00	14.21	PK+	N	GND
4	2.238	29.25	10.05	39.30	56.00	16.70	PK+	N	GND