


RE Test Report 1#

Project No. :	LNB2406190001	Customer :	嘉邦电子
Sample No. :	LNB2406190001-1-2	EUT :	PCB 板
Model :	CBE-1505	Mode :	Working
Voltage :	AC 240V/50Hz	Engineer :	Nermar
Temp :	22°C	Humi :	70%
Reviewed By :	/	Remark :	/

DateTime:2024-06-19 17:19:14

Test Standard	(RE) J 55014-1				
Receiver	Antenna	Band	Detector	RBW	Time
ESR 7	VULB 9163	30 MHz-1 GHz	QPK	120 kHz	1 s

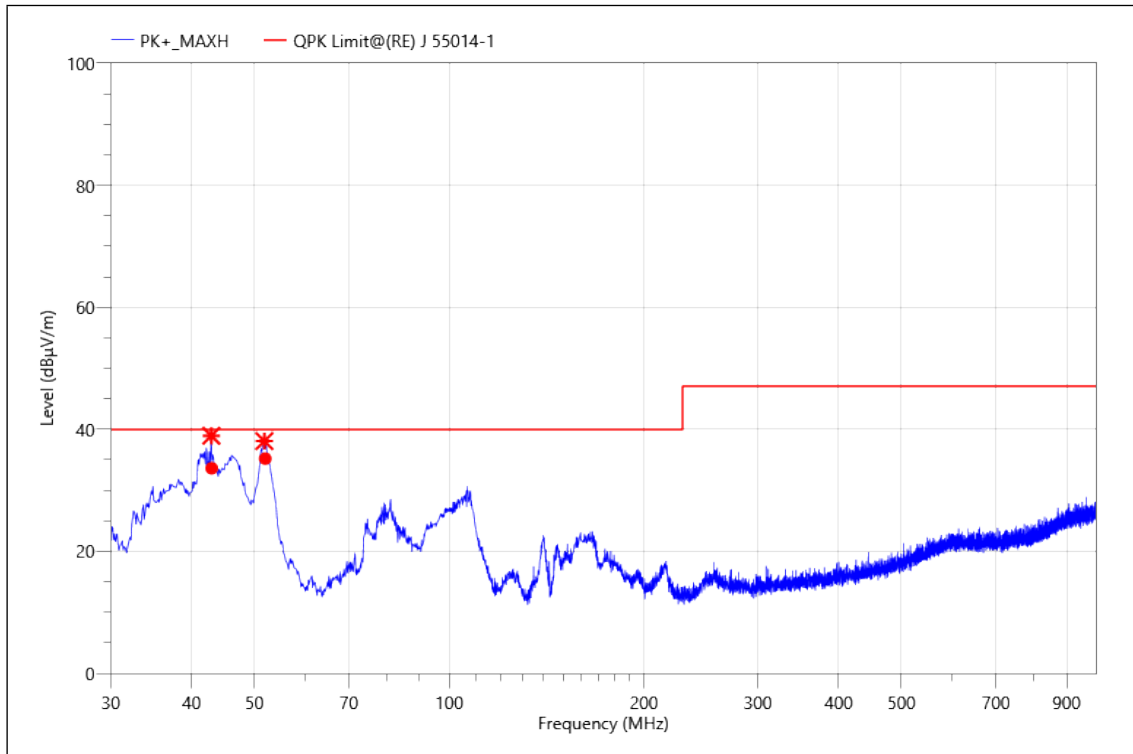

Critical_Freqs

(Margin=Limit-Meas.(Reading +Corr.))

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Height (cm)	Pol.	Azimuth (deg)
1	42.901	63.24	-24.3	38.94	40.00	1.06	PK+	100	V	296.3
2	51.825	62.38	-24.31	38.07	40.00	1.93	PK+	100	V	72.1

Final_Result

(Margin=Limit-Meas.(Reading +Corr.))


No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Height (cm)	Pol.	Azimuth (deg)	Verdict
1	42.955	57.91	-24.29	33.62	40.00	6.38	QPK	100.0	V	296.3	PASS
2	51.965	59.56	-24.36	35.20	40.00	4.80	QPK	100.0	V	72.1	PASS

RE Test Report 1#

Project No. :	LNB2406190001	Customer :	嘉邦电子
Sample No. :	LNB2406190001-1-2	EUT :	PCB 板
Model :	CBE-1505	Mode :	Working
Voltage :	AC 240V/50Hz	Engineer :	Nermar
Temp :	22°C	Humi :	70%
Reviewed By :	/	Remark :	/

DateTime:2024-06-19 17:22:08

Test Standard	(RE) J 55014-1				
Receiver	Antenna	Band	Detector	RBW	Time
ESR 7	VULB 9163	30 MHz-1 GHz	PK+	100 kHz	500 ms

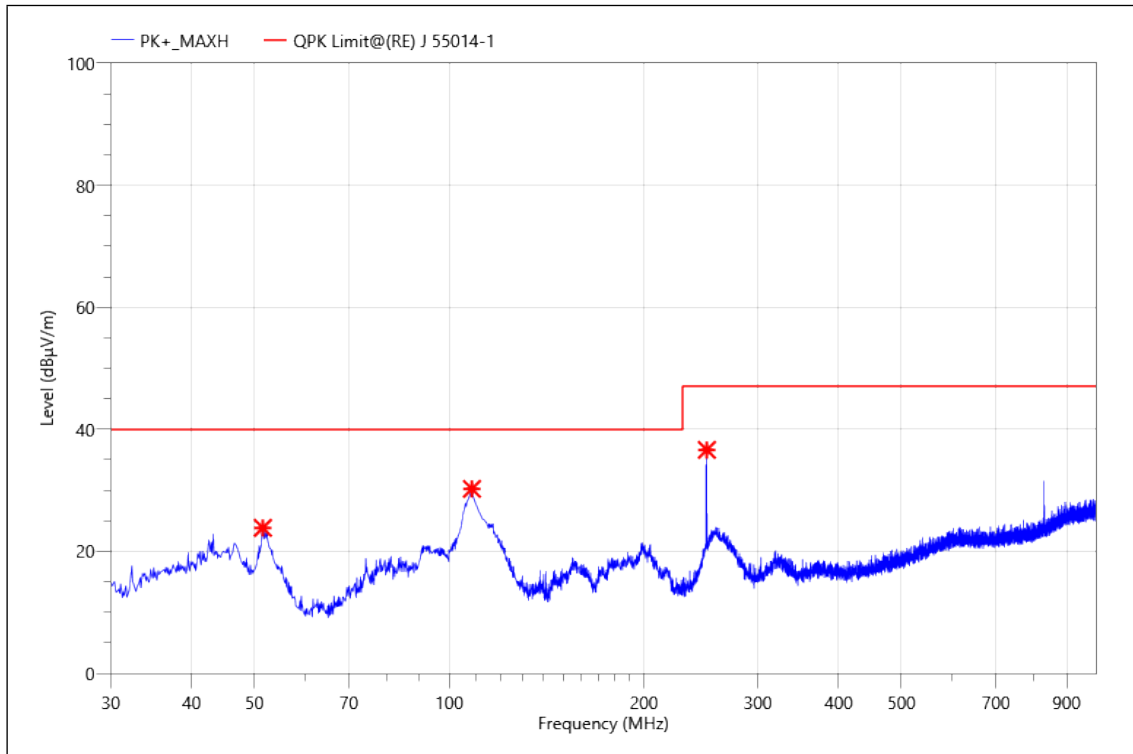

Critical_Freqs

(Margin=Limit-Meas.(Reading +Corr.))


No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Height (cm)	Pol.	Azimuth (deg)
1	51.534	48.05	-24.2	23.85	40.00	16.15	PK+	100	H	172.7
2	108.473	56.57	-26.33	30.24	40.00	9.76	PK+	200	H	13.1
3	250.190	60.20	-23.57	36.63	47.00	10.37	PK+	200	H	13.1

RE Test Report 1#

Project No. :	LNB2406190001	Customer :	嘉邦电子
Sample No. :	LNB2406190001-1-2	EUT :	PCB 板
Model :	CBE-1505	Mode :	Working
Voltage :	AC 100V/60Hz	Engineer :	Nermar
Temp :	22°C	Humi :	70%
Reviewed By :	/	Remark :	/

DateTime:2024-06-19 17:26:21

Test Standard	(RE) J 55014-1				
Receiver	Antenna	Band	Detector	RBW	Time
ESR 7	VULB 9163	30 MHz-1 GHz	QPK	120 kHz	1 s

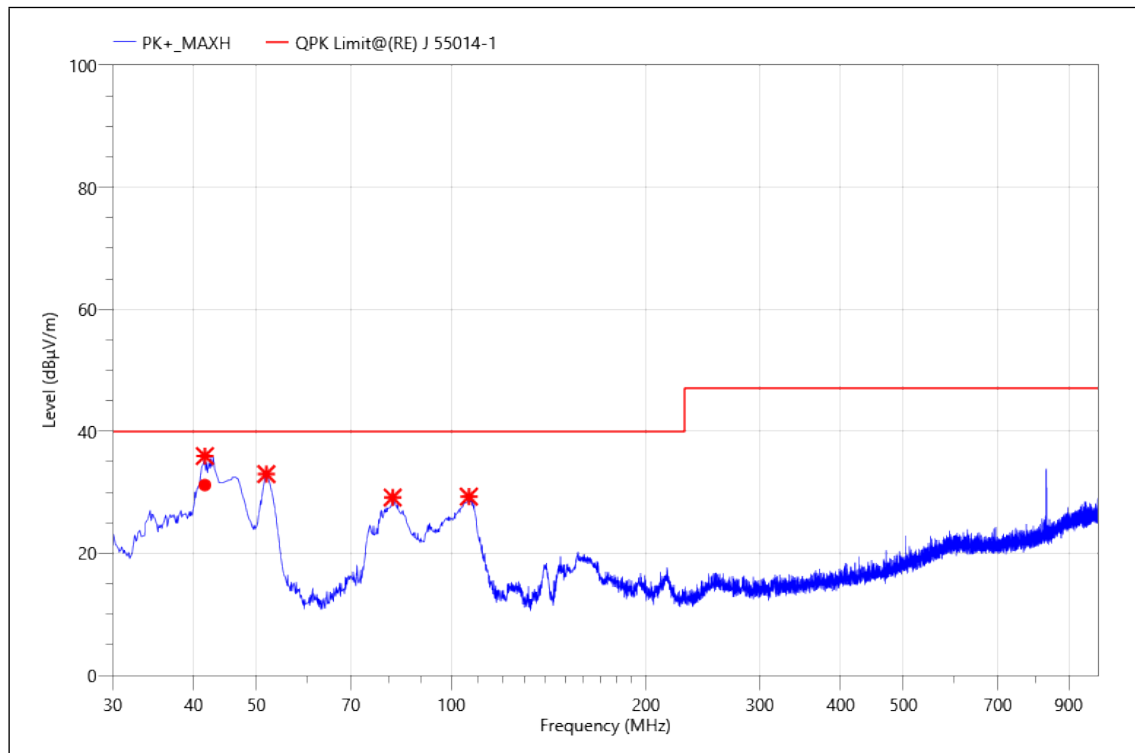

Critical_Freqs

(Margin=Limit-Meas.(Reading +Corr.))

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Height (cm)	Pol.	Azimuth (deg)
1	41.640	60.53	-24.58	35.95	40.00	4.05	PK+	100	V	276.6
2	51.825	57.30	-24.31	32.99	40.00	7.01	PK+	100	V	136.4
3	81.216	54.82	-25.67	29.15	40.00	10.85	PK+	100	V	101.5
4	106.533	55.73	-26.43	29.30	40.00	10.70	PK+	100	V	103.9

Final_Result

(Margin=Limit-Meas.(Reading +Corr.))


No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Height (cm)	Pol.	Azimuth (deg)	Verdict
1	41.620	55.79	-24.59	31.20	40.00	8.80	QPK	100.0	V	276.6	PASS

RE Test Report 1#

Project No. :	LNB2406190001	Customer :	嘉邦电子
Sample No. :	LNB2406190001-1-2	EUT :	PCB 板
Model :	CBE-1505	Mode :	Working
Voltage :	AC 100V/60Hz	Engineer :	Nermar
Temp :	22°C	Humi :	70%
Reviewed By :	/	Remark :	/

DateTime:2024-06-19 17:29:18

Test Standard	(RE) J 55014-1				
Receiver	Antenna	Band	Detector	RBW	Time
ESR 7	VULB 9163	30 MHz-1 GHz	PK+	100 kHz	500 ms

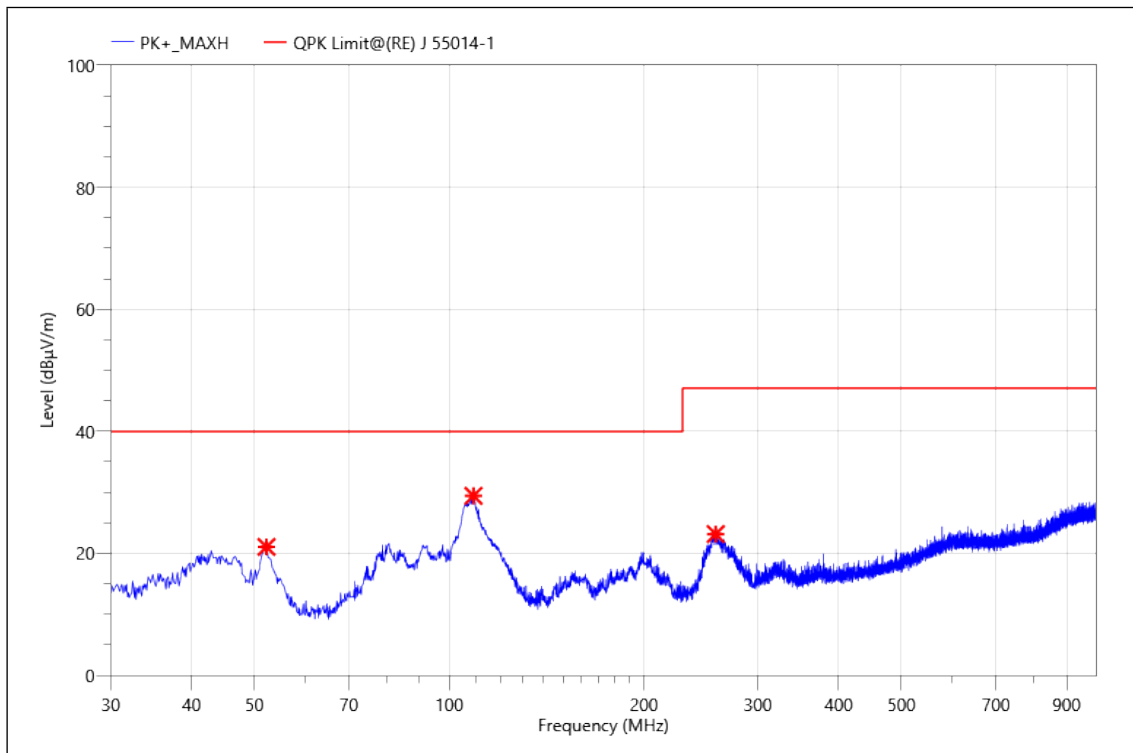

Critical_Freqs

(Margin=Limit-Meas.(Reading +Corr.))

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Height (cm)	Pol.	Azimuth (deg)
1	52.213	45.51	-24.45	21.06	40.00	18.94	PK+	100	H	118.0
2	109.055	55.73	-26.3	29.43	40.00	10.57	PK+	200	H	0
3	258.241	46.56	-23.39	23.17	47.00	23.83	PK+	100	H	195.6